Mitsubishi General-Purpose Programmable Controller

Renewal Tool Conversion Adapter

Model

ERNT-CQTX121

User's Manual

Model	ERNT-CQTX121
50CM-D180065-A(1007)MEE	

MITSUBISHI ELECTRIC ENGINEERING COMPANY LIMITED

HEAD OFFICE:NIHONJISHO-DAIICHI BLDG.1-13-5, KUDANKITA CHIYODA-KU, TOKYO 102-0073, JAPAN
NAGOYA ENGINEERING OFFICE:139 SHIMOYASHIKICHO-SHIMOYASHIKI, KASUGAI, AICHI 486-0906, JAPAN

● SAFETY PRECAUTIONS ●

(Always read these precautions prior to use.)

Before using this product, please read this manual carefully and pay full attention to safety to ensure that the product is used correctly.

The precautions presented in this manual are concerned with this product only. For Programmable Controller system safety precautions, refer to the user's manual of the MELSEC-Q series CPU module to be used.

In this manual, the safety precautions are ranked as "DANGER" and "CAUTION."

⚠ DANGER	Indicates that incorrect handling may cause hazardous conditions, resulting in death or severe injury.
⚠ CAUTION	Indicates that incorrect handling may cause hazardous conditions, resulting in medium or minor injury and/or property damage.

Note that failure to observe the ⚠ CAUTION level instructions may lead to a serious consequence according to the circumstances. Always follow the precautions of both levels because they are important to personal safety.

Please keep this manual in an easy-to-access location for future reference, and be sure to provide the manual to the end user.

Installation Precautions

⚠ CAUTION

- Use the conversion adapter and conversion adapter anchor base in an environment of the general specifications defined in the MELSEC-Q series CPU module user's manual. Failure to do so could lead to electric shock, fire, malfunction or product failure or deterioration.
- Do not come in direct contact with the conductive area of the conversion adapter. Doing so could lead to system malfunction or failure.
- Fully secure the conversion adapter and conversion adapter anchor base using the installation screws, and tighten the installation screws securely within the specified torque range. Failure to do so could cause the conversion adapter and anchor base to fall, resulting in conversion adapter and conversion adapter anchor base damage.

Wiring Precautions

⚠ DANGER

- Be sure to shut off all phases of the external power supply before performing installation or wiring work. Failure to do so could result in electric shock or product damage.
- If you want to energize and run the unit after completing the installation and wiring work, be sure to close the terminal block cover attached to the SYSMAC C series terminal block. Failure to do so could result in electric shock.

⚠ CAUTION

- Properly wire the conversion adapter after verifying the rated voltage and terminal layout of the input/output module to be used. Connecting a power supply with a different rating or improper wiring could lead to fire or product failure.
- Securely tighten the conversion adapter installation screws, conversion adapter anchor base installation screws, SYSMAC C series terminal block installation screws and SYSMAC C series connector installation screws within the specified torque range. A loose screw may result in a short circuit, fire or malfunction. An excessively tightened screw may result in screw or conversion adapter damage, causing the conversion adapter to fall, a short circuit or product malfunction.
- Do not allow foreign matter such as cuttings or wiring shavings to enter the conversion adapter or module. Doing so could lead to fire, failure or malfunction.

Startup and Maintenance Precautions

DANGER

- Do not touch the terminals and connector during energization. Doing so could result in electric shock or malfunction.
- Be sure to shut off all phases of the external power supply before cleaning and retightening the terminal screws. Failure to do so could lead to electric shock. Excessively tightened screws could result in conversion adapter or input/output module damage, causing the conversion adapter to fall, a short circuit or product malfunction.

CAUTION

- Do not disassemble or modify the conversion adapter. Doing so could lead to failure, malfunction, injury or fire.
- The conversion adapter case is made of resin. Do not drop or apply excessive impact to the case. Doing so could lead to conversion adapter damage.

Disposal Precautions

DANGER

- When disposing of the product, treat it as industrial waste.

Related Manuals

Manual Title	Manual No. (Model Code)	Remarks
MELSEC-Q Series Building Block I/O Module User's Manual	SH-080042 (13JL99)	By Mitsubishi Electric Corporation

EMC AND LOW VOLTAGE DIRECTIVES

Compliance to the EMC Directive, which is one of the EU Directives, has been a legal obligation for the products sold in European countries since 1996 as well as the Low Voltage Directive since 1997.

Manufacturers who recognize their products are compliant to the EMC and Low Voltage Directives are required to declare that print a "CE mark" on their products.

Authorized representative in Europe

Authorized representative in Europe is shown below.

Name: Mitsubishi Electric Europe B.V. (EMC C.C. Division)

Address: Gothaer strasse 8, 40880 Ratingen, Germany

1. Overview

This manual describes the Mitsubishi general-purpose Programmable Controller renewal tool conversion adapter (ERNT-CQTX121) and the conversion adapter anchor base (sold separately; ERNT-QF12/-QF8/-QF5) that secures the bottom of the conversion adapter. The conversion adapter is a product that converts the differences in SYSMAC C series and MELSEC-Q series pin assignments.
Once you have opened the packaging, verify that it contains the following products.

Product	Quantity
Conversion adapter	1
Mounting bracket	1
Mounting bracket fixing screw (M3.5 x 6)	2

2. Conversion Adapter Product Configuration

The conversion adapter is comprised of the following constituent products besides the adapter itself.

(1) Conversion Adapter Anchor Base (Sold Separately)

The conversion adapter anchor base secures the bottom of the conversion adapter and is required for conversion adapter use. One anchor base is required per base.

Conversion Adapter Anchor Base Model	Specifications	
	Type	Weight (g)
ERNT-QF12	12-slot conversion adapter anchor base	620
ERNT-QF8	8-slot conversion adapter anchor base	435
ERNT-QF5	5-slot conversion adapter anchor base	290

(2) Base Adapter (Sold Separately)

The base adapter enables MELSEC-Q series installation using the installation holes of the SYSMAC C series base unit. (Additional hole machining not required)

Base Adapter Model	Specifications			
	SYSMAC C Series Compliant Module	MELSEC-Q Series Compliant Module	Installable Conversion Adapter Anchor Base	Weight (g)
ERNT-CQB081	C500-BC081/082 C500-BC091 C2000-BC061 C500-BI081 C2000-BI083	Q312B Q38B Q612B Q68B	ERNT-QF12 ERNT-QF8	892
ERNT-CQB051	C500-BC051/052 C500-BC061 C500-BI051	Q38B Q35B Q68B Q65B Q55B	ERNT-QF8 ERNT-QF5	710
ERNT-CQB031	C500-BC031	Q35B Q33B	ERNT-QF5	542

3. Conversion Adapter Product Specifications

Conversion Adapter Model	SYSMAC C Series Module Model	No. of Input Points	MELSEC-Q Series Module Model	Conversion Adapter Weight (g)
ERNT-CQTX121	C500-IA121	16 points	QX10	119

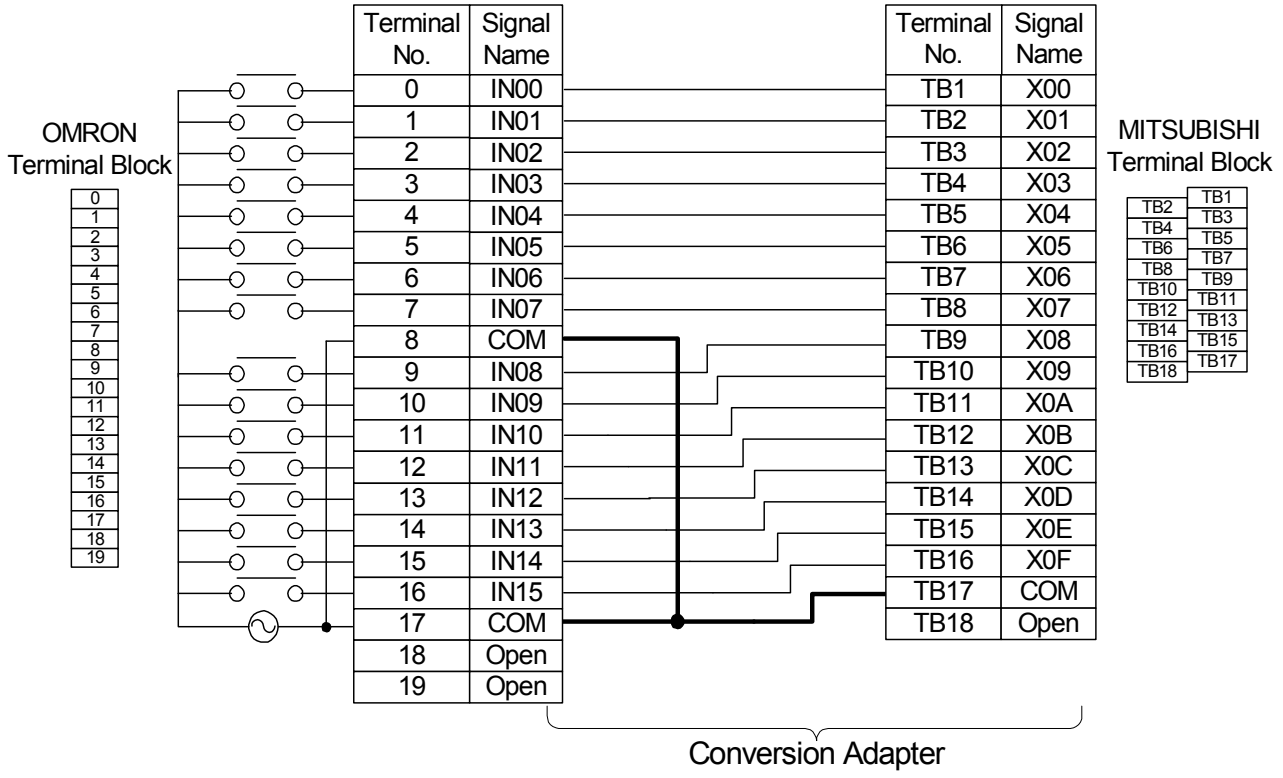

Input Module Specification Comparison Chart

Specifications \ Model		SYSMAC C Series	MELSEC-Q Series
		C500-IA121	QX10
No. of input points		16 points	16 points
input voltage		100 to 120V AC	100 to 120V AC
input current		10mA (100V AC)	Approx. 8mA (100V AC)
Operating voltage	ON voltage	60V AC or more	80V AC or more
	OFF voltage	40V AC or less	30V AC or less
Response time	ON Delay	35ms or less	15ms or less
	OFF Delay	55ms or less	20ms or less
Isolation method		Photocoupler isolation	Photocoupler isolation
External connection system		20-point terminal block	18-point terminal block
No. of points per common		8points (2 circuits)	16points (1 circuit)
Internal current consumption		180mA or less	50mA

Note:

1. A wiring change is required if the SYSMAC C series terminal numbers 8, 17 have been separated due to a change in the number of points per common from 8 points (2 circuits) to 16 points.
2. For detailed specifications not stated in the Input Module Specification Comparison Chart and for general specifications, refer to the user's manual of the input module to be used.

4. Mounting and Installation

4.1 Handling Precautions

(1) Do not touch the terminals and connector during energization. Doing so could result in electric shock or malfunction.

(2) Do not disassemble or modify the conversion adapter. Doing so could result in failure, malfunction, injury or fire.

(3) Do not come in direct contact with the conductive area of the conversion adapter. Doing so could result in system malfunction or failure.

(4) Fully secure the conversion adapter and conversion adapter anchor base using the installation screws, and securely tighten the screws within the specified torque range. Failure to do so could cause the conversion adapter and anchor base to fall, resulting in conversion adapter and conversion adapter anchor base damage.

4.2 Use Precautions

Item	Use Precautions
Wiring	A wiring change is required if the COM terminals have been separated due to a change in the number of points per common from 8 points (2 circuits) to 16 points.
Module width dimension	Because the module width decreases (from 34.5mm to 27.4mm), the wiring area decreases. Verification prior to installation is required. 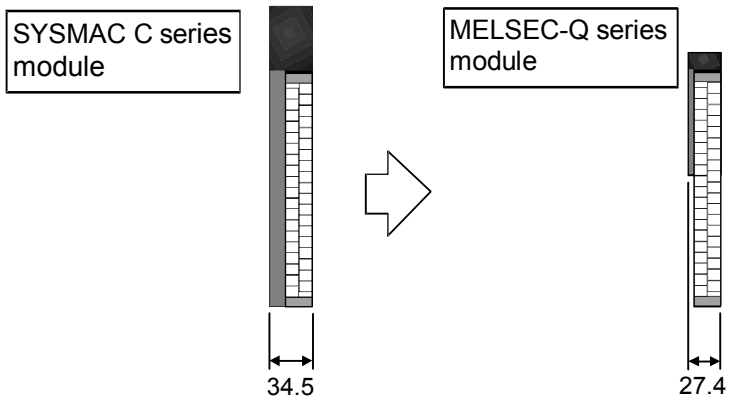
Depth	The depth increases. Verification prior to installation is required. 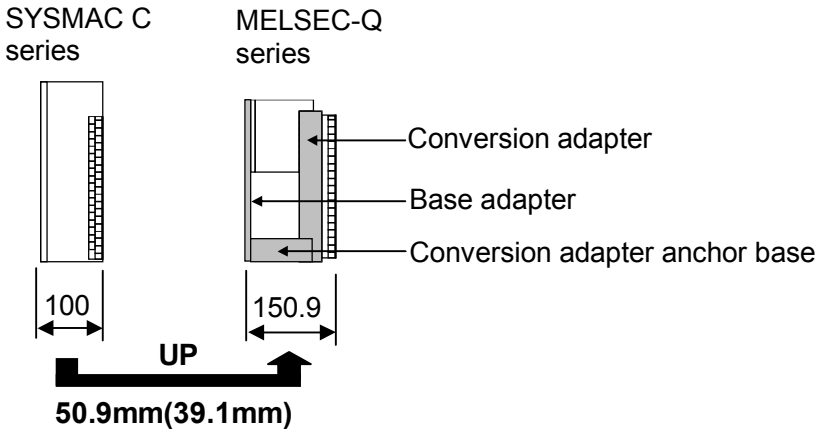 The value in parentheses is the dimension when the base adapter is not used.

4.3 Installation Environment

For details of the installation environment, refer to the user's manual of the MELSEC-Q series CPU module to be used.

5. Part Names and Installation Method

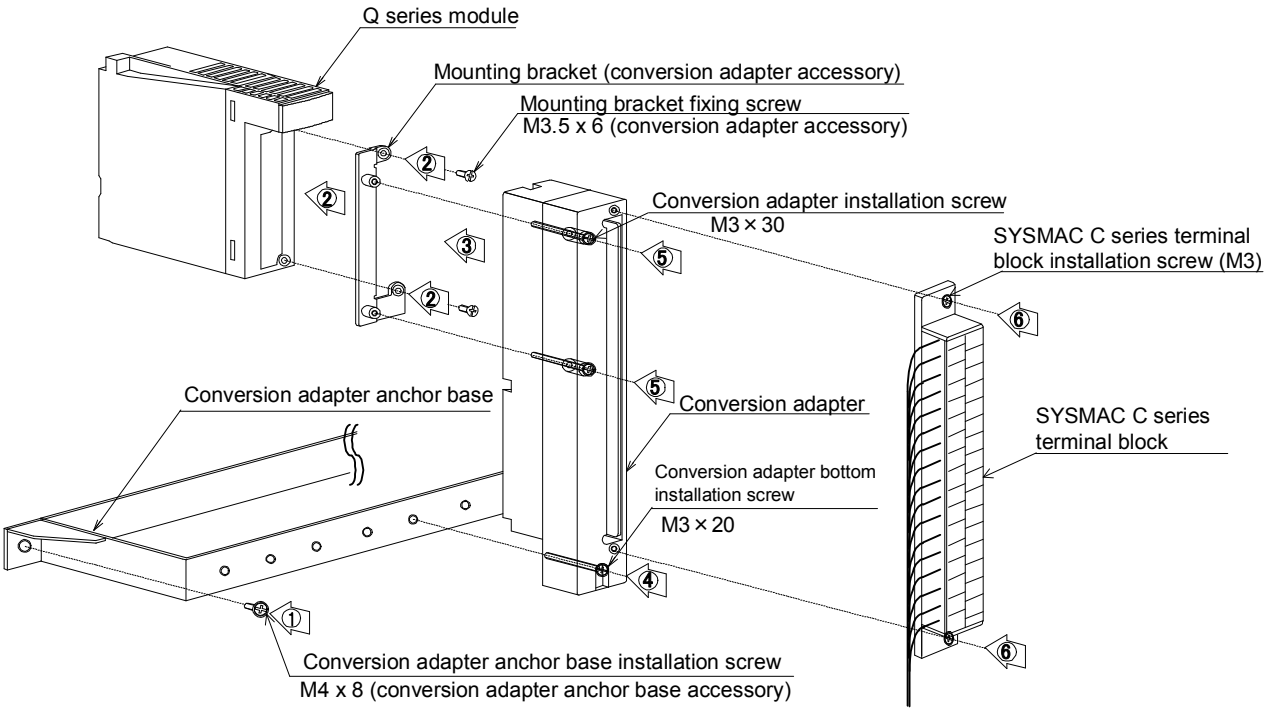
Q series module
Mounting bracket (conversion adapter accessory)
Mounting bracket fixing screw
M3.5 x 6 (conversion adapter accessory)
Conversion adapter installation screw
M3 × 30
SYSMAC C series terminal block installation screw (M3)
Conversion adapter anchor base
Conversion adapter
SYSMAC C series terminal block
Conversion adapter bottom installation screw
M3 × 20
Conversion adapter anchor base installation screw
M4 x 8 (conversion adapter anchor base accessory)

5.1 Installation Method

[1] Secure the conversion adapter anchor base to the base adapter or control panel using the conversion adapter anchor base installation screws (M4 × 8) provided as an accessory. (Two end locations)

[2] Secure the mounting bracket to the Q series module using the mounting bracket fixing screws [M3.5 × 6 (conversion adapter accessory); two upper/lower locations].

[3] Mount the conversion adapter onto the mounting bracket.

[4] Secure the conversion adapter using the conversion adapter bottom installation screw (M3 × 20; 1 location).

[5] Secure the conversion adapter using the conversion adapter installation screws (M3 × 30; 2 locations).

[6] Secure the SYSMAC C series terminal block to the conversion adapter using the terminal block installation screws (M3; two upper/lower locations).

5.2 Tightening Torque

Tighten the module installation screws to the specified torque below. An inappropriate tightening torque could cause the product to fall or result in a short circuit, product failure or malfunction.

Screw Location	Tightening Torque Range
Conversion adapter anchor base installation screw (M4 screw)	139 to 189N·cm
Mounting bracket fixing screw (M3.5 screw)	68 to 92 N·cm
Conversion adapter bottom installation screw (M3 screw)	43 to 57 N·cm
Conversion adapter installation screw (M3 screw)	
SYSMAC C series terminal block installation screw (M3 screw)	

6. Conversion Adapter Anchor Base Installation Method

To use the conversion adapter, a conversion adapter anchor base (ERNT-QF12/-QF8/-QF5) is required.

Q Base Unit / Conversion Adapter Anchor Base	Q312B	Q38B	Q35B	Q33B	Q612B	Q68B	Q65B	Q55B
ERNT-QF12	◎	×	×	×	◎	×	×	×
ERNT-QF8	○	◎	×	×	○	◎	×	×
ERNT-QF5	×	○	◎	○	×	○	◎	◎

◎: Applicable

○: Applicable (with some restrictions*1)

×: Not applicable

*1: There are certain slots in which the conversion adapter cannot be installed. For example, the conversion adapter cannot be installed in Slots 8 to 11 (4 slots) of the Q base unit when Q312B (Q base unit) is used with ERNT-QF8 (conversion adapter anchor base).

The machining of screw holes (M4 × 2 locations) used to install the conversion adapter anchor base, such as described below, is required when a base adapter (sold separately) is not used.

(1) With Main Base Unit Q312B, Q38B, Q35B or Q33B

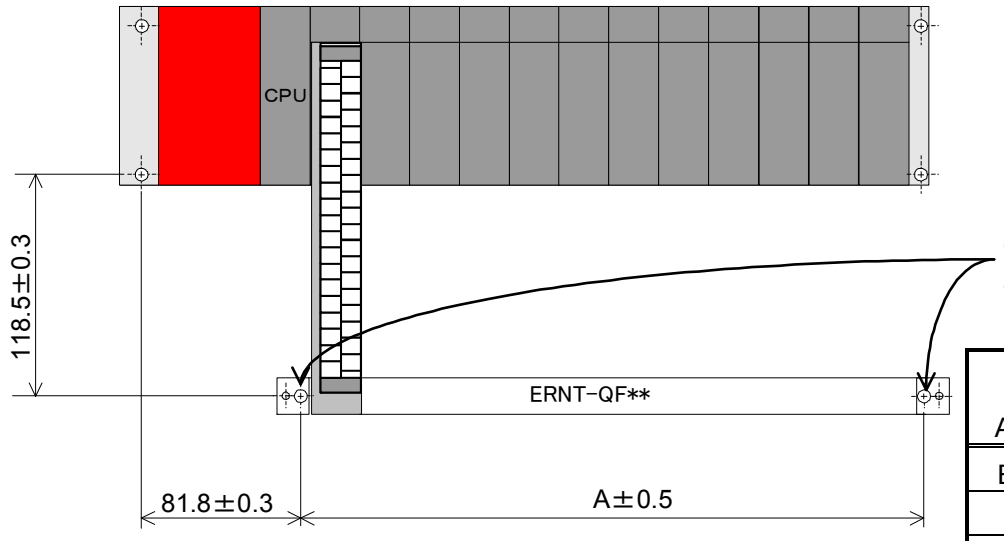

Machine screw holes (M4 x 2 locations) in these locations for conversion adapter anchor base installation.

Conversion Adapter Anchor Base	A
ERNT-QF12	347.2
ERNT-QF8	236
ERNT-QF5	152.6

(2) With Extension Base Unit Q612B, Q68B or Q65B

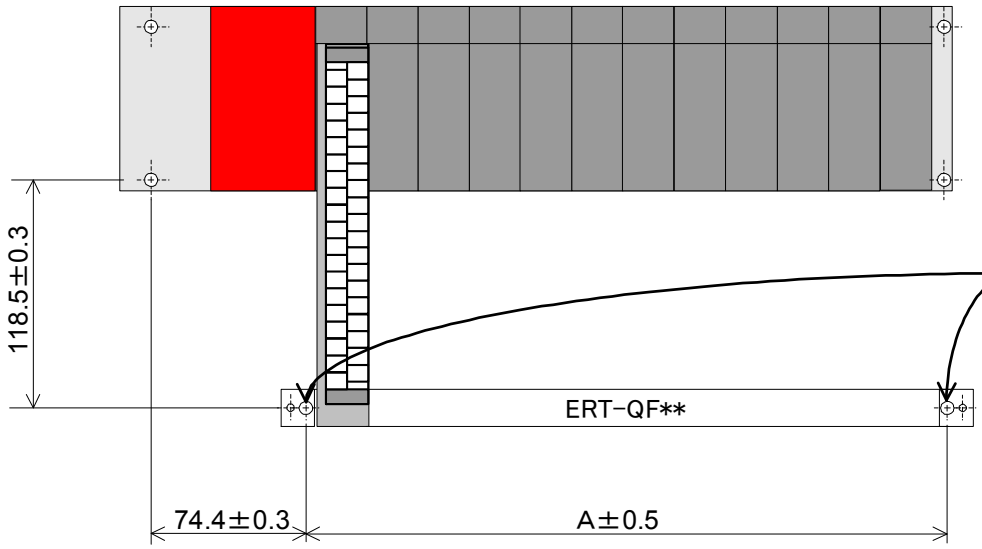

Machine screw holes (M4 x 2 locations) in these locations for conversion adapter anchor base installation.

Conversion Adapter Anchor Base	A
ERNT-QF12	347.2
ERNT-QF8	236
ERNT-QF5	152.6

(3) With Extension Base Unit Q55B

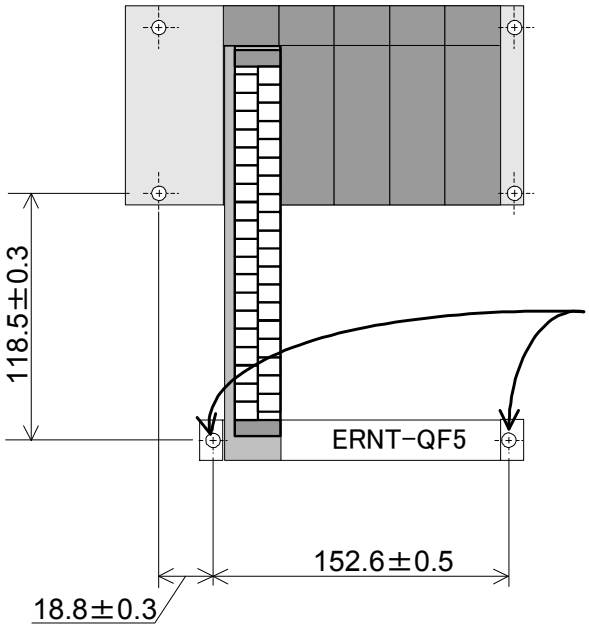

Machine screw holes (M4 x 2 locations) in these locations for conversion adapter anchor base installation.

Tips
Use of a base adapter (sold separately) eliminates the need for additional screw hole machining on the control panel. (A base adapter is a product that enables MELSEC-Q series installation using the SYSMAC C series installation holes.)

7. External Dimensions

7.1 Conversion Adapter

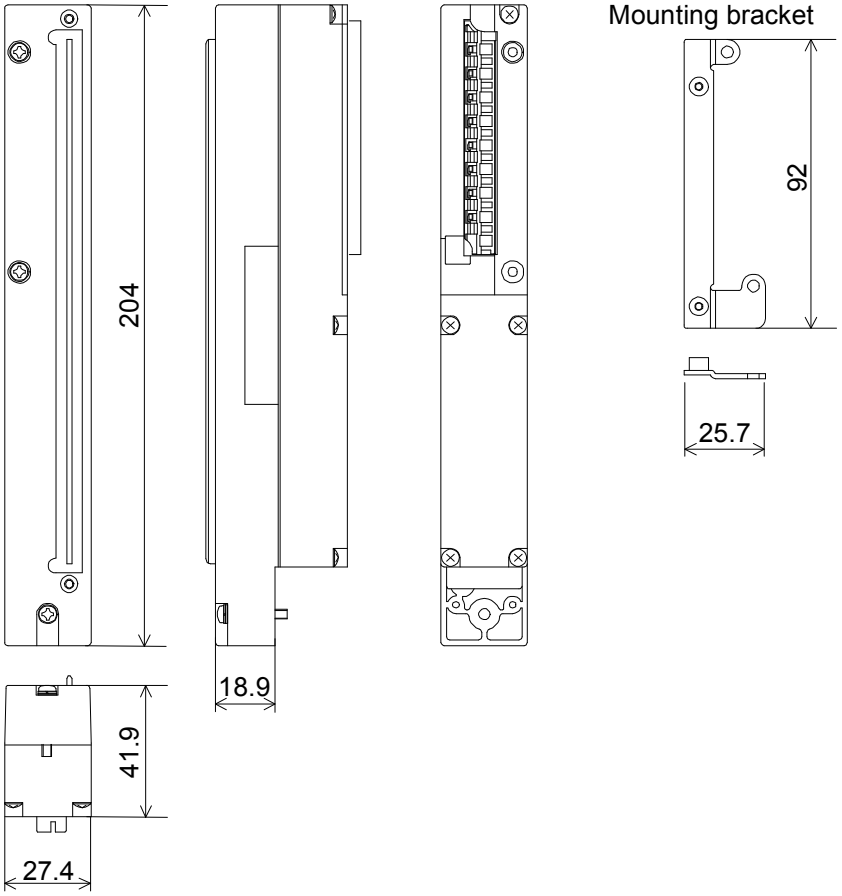

7.2 Conversion Adapter Anchor Base

(1) ERNT-QF12

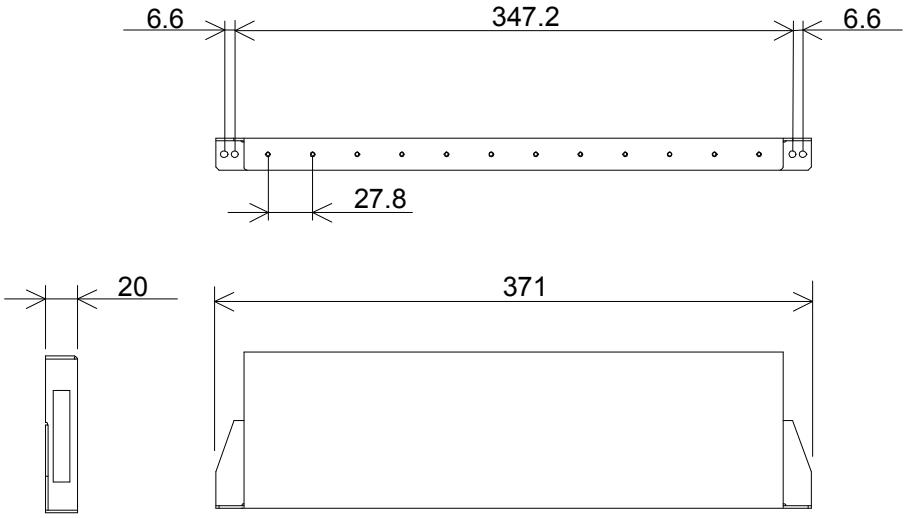

(2) ERNT-QF8

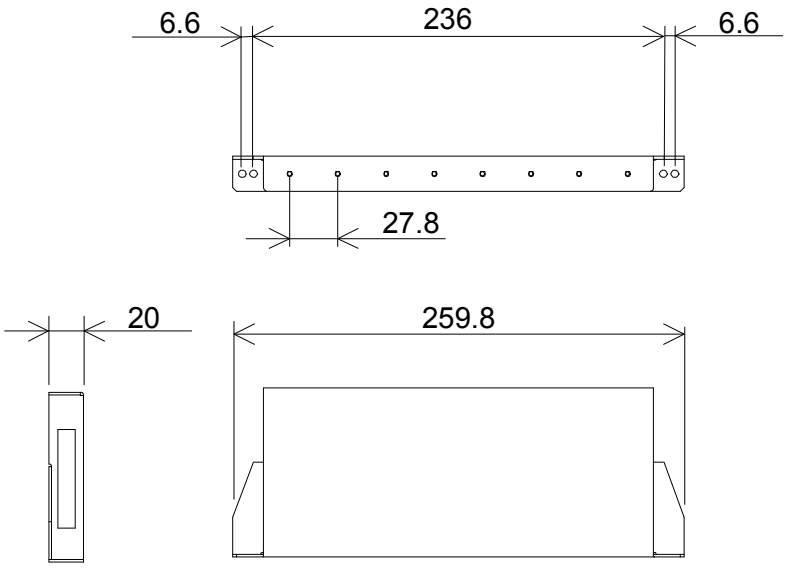

(3) ERNT-QF5

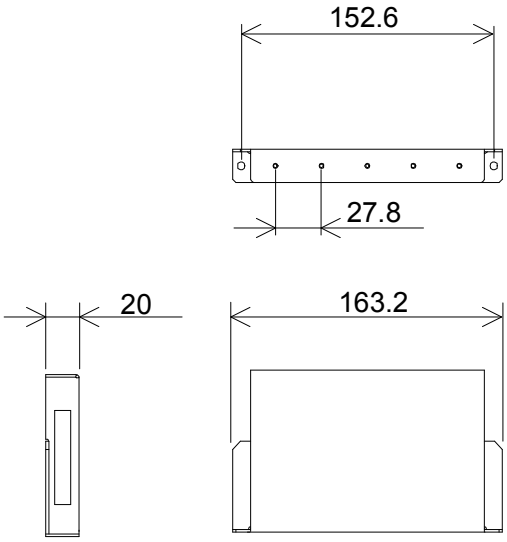

Product Warranty Details

Please confirm the following product warranty details prior to product use.

Gratis Warranty Terms and Gratis Warranty Range

If any fault or defect (hereinafter referred to as “Failure”) attributable to Mitsubishi Electric Engineering Company Limited (hereinafter referred to as “MEE”) should occur within the gratis warranty period, MEE shall repair the product free of charge via the distributor from whom you made your purchase.

■ **Gratis Warranty Period**

The gratis warranty period of this product shall be one (1) year from the date of purchase or delivery to the designated place.
Note that after manufacture and shipment from MEE, the maximum distribution period shall be six (6) months, and the gratis warranty period after manufacturing shall be limited to eighteen (18) months.
In addition, the gratis warranty period for repaired products shall not exceed the gratis warranty period established prior to repair.

■ **Gratis Warranty Range**

The gratis warranty range shall be limited to normal use based on the usage conditions, methods and environment, etc., defined by the terms and precautions, etc., given in the instruction manual, user’s manual and caution labels on the product.

Warranty Period after Discontinuation of Production

(1) MEE shall offer product repair services (fee applied) for seven (7) years after production of the product has been discontinued. Discontinuation of production shall be reported via distributors.
(2) Product supply (including spare parts) is not possible after production has been discontinued.

Exclusion of Opportunity Loss and Secondary Loss from Warranty Liability

Regardless of the gratis warranty period, MEE shall not be liable for compensation for damages arising from causes not attributable to MEE, opportunity losses or lost profits incurred by the user due to Failures of MEE products, damages or secondary damages arising from special circumstances, whether foreseen or unforeseen by MEE, compensation for accidents, compensation for damages to products other than MEE products, or compensation for other work carried out by the user.

Changes in Product Specifications

The specifications given in the catalogs, manuals and technical documents are subject to change without notice.

This document is a new publication, effective July 2010. Specifications are subject to change without notice. The standard price does not include consumption tax. Please note that consumption tax will be added at the time of purchase. This manual was printed on recycled paper.

Developed July 2010

50CM-D180065-A